

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
20 September 2001 (20.09.2001)

PCT

(10) International Publication Number
WO 01/69569 A2

- (51) International Patent Classification⁷: **G08G** (74) Agents: **GAIMAN, Barry et al.**; Daly, Crowley & Moford, LLP, Suite 101, 275 Turnpike Street, Canton, MA 02021 (US).
- (21) International Application Number: **PCT/US01/40298**
- (22) International Filing Date: **14 March 2001 (14.03.2001)** (81) Designated States (*national*): **AU, IL.**
- (25) Filing Language: **English** (84) Designated States (*regional*): **European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).**
- (26) Publication Language: **English**
- (30) Priority Data:
60/189,858 **15 March 2000 (15.03.2000)** **US** **Published:**
— *without international search report and to be republished upon receipt of that report*
- (71) Applicant: **RAYTHEON COMPANY [US/US]; 141 Spring Street, Lexington, MA 02421 (US).**
- (72) Inventor: **KAVNER, Douglas, M.; 2703 E. Blueridge Avenue, Orange, CA 92867 (US).**
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: **PREDICTIVE AUTOMATIC INCIDENT DETECTION USING AUTOMATIC VEHICLE IDENTIFICATION**

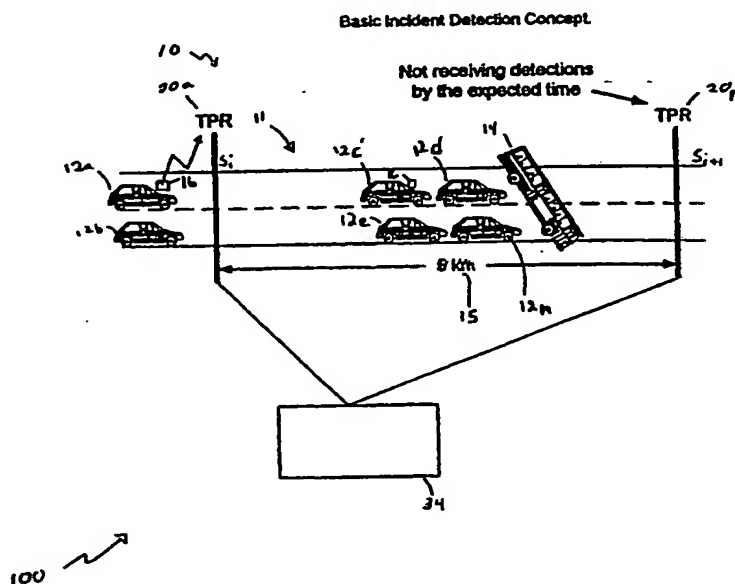

(57) Abstract: A system and method for detecting incidents along a roadway are provided. A plurality of readers are spaced at intervals along a roadway for reading uniquely identified data from each of a plurality of vehicles. These readings are correlated to obtain information on each of the vehicles and to determine the number of vehicles potentially affected by incidents along the roadway. Finally, the number of each of the vehicles potentially affected by incidents is compared to a sample threshold in order to determine if a traffic incident has occurred.

BEST AVAILABLE COPY

PREDICTIVE AUTOMATIC INCIDENT DETECTION USING AUTOMATIC VEHICLE IDENTIFICATION

FIELD OF THE INVENTION

5 This invention relates generally to traffic control systems and more particularly to automatically predicting traffic incidents using automatic vehicle identification.

BACKGROUND OF THE INVENTION

10 In traffic control applications, it is often desirable to detect traffic incidents that cause a disruption in the flow of traffic. Conventional traffic management systems use sensors that monitor the presence and speed of vehicles without individually identifying each vehicle. Such systems rely on gathering data from traffic helicopters, camera systems, and sensors to detect the presence of a vehicle. One such system includes an
15 induction loop buried in a roadway.

 Conventional systems typically use incident detection algorithms that process the sensor data and declare when an incident has occurred. One such algorithm includes detecting a queue of vehicles that forms because a traffic incident causes a
20 backup in a roadway. There is a need to minimize the rate of false alarms while attempting to quickly detect the formation of a queue. A false alarm occurs when a queue is incorrectly detected and an incident is declared by the algorithm but has not in fact occurred. One solution to this problem requires close sensor spacing (about one km) to quickly detect that a queue is forming. Closely deployed sensors are
25 expensive in terms of infrastructure and maintenance costs.

 There have been attempts to monitor the time required for a small set of vehicles to travel various sections of highway. These vehicles have special instrumentation that allows the vehicles to record time and location while traveling on
30 the roadway. These attempts have mainly been for traffic reporting purposes rather than incident detection.

 Conventional traffic control systems require several operators and expensive remote control cameras with zoom, pan and tilt features. These systems can miss traffic

problems on sections without cameras. In addition there is no early warning of traffic incidents. Other industry standard algorithms use data collected by induction loop sensors that can measure the number of vehicles and speeds of the vehicles. These algorithms wait for queues to build up before detecting problems. These systems require
5 closely spaced sensors because queues can build up anywhere on the roadway and information about the travel time of individual vehicles is not being collected and processed.

U.S. Patent No. 5,696,503 entitled "Wide Area Traffic Surveillance Using a
10 Multisensor Tracking System," and assigned to Condition Monitoring Systems, Inc, describes a wide area traffic surveillance using a multi-sensor tracking system. This system attempts to track individual vehicles within a sensor's field of view in a manner similar to an air traffic control radar system.

15 In order to detect incidents anywhere on the road within, for example five minutes, sensor spacing cannot exceed the size of the queue that develops five minutes after an incident. If the sensors were widely spaced, a conventional algorithm might not detect a queue build up for several minutes because the sensor might be located a distance, equal to traveling five minutes at an average speed,
20 before the occurrence of an incident. Where the traffic flow is light, an incident would only cause the formation of a short queue of vehicles. A conventional system would require sensors to be spaced less than 500 meters apart to detect the short queue within five minutes.

25 By rapidly detecting traffic incidents on a roadway, emergency personnel can be dispatched to minimize the time that traffic lanes are blocked. For a roadway operating near capacity, it can take longer for a queue to clear than the time that the incident actually blocks traffic. It is therefore important to reduce the potential backlog of traffic by rapid detection.

30

SUMMARY OF THE INVENTION

It is an object of the present invention to automatically detect traffic incidents on a highway, with a system having full road coverage, limited operator intervention and widely spaced sensors.

- 5 It is another object of the present invention to detect incidents anywhere on roadways with relatively low traffic volumes quickly without needing to provide closely spaced sensors.

- 10 In accordance with an aspect of the present invention, a method is provided to detect incidents along a roadway including the steps of arranging a plurality of readers at spaced intervals along a roadway for reading uniquely identified data from each of a plurality of vehicles, and correlating the data with previously read data to obtain information on each of the plurality of vehicles, determining the number of each of said plurality of vehicles potentially affected by incidents along the roadway.
- 15 Additionally the method includes the step of comparing the number of each of the plurality of vehicles potentially affected by incidents to a sample threshold. With such a technique, the method can detect incidents by analyzing data from widely spaced automatic vehicle identification (AVI) readers along a roadway where a significant portion of vehicles have transponders. The inventive method can detect
- 20 many types of incidents faster using data from widely spaced sensors than conventional methods can using closely spaced sensors because the system does not merely measure the time taken to travel from one point to another for every vehicle, rather it actively monitors every transponder equipped vehicle on the roadway in real-time and determines when a statistically significant number are overdue or arrive
- 25 early accounting for varying roadway and traffic conditions.

- In accordance with a further aspect the present invention, thresholds used to determine overdue and early arriving vehicles are adjusted according to the roadway usage. With such a technique, the incident detection method is capable of accounting
- 30 for variations in individual vehicle speed due to the possible presence of law enforcement personnel, varying road grades, mechanical breakdowns, service/rest station stops, vehicles entering from on-ramps, and vehicles exiting on off-ramps between sensor locations.

One of the novel features in this present invention is the ability to detect incidents without having to directly sense the incident or the backlog caused by the incident. An overdue vehicle does not have to be detected at the end of the segment in which it is traveling before an incident can be declared. An early arriving vehicle provides information on possible incidents near the start of the previous segment. Therefore the incident detection system is able to detect incidents without the need for closely spaced automatic vehicle identification (AVI) readers. The present invention does not require complete tracking of every vehicle on the roadway and can function when only a fraction of the vehicles are equipped with AVI transponders. The algorithms used in the present invention can accommodate vehicles that stop or slow down in a given segment due to reasons other than an incident.

In accordance with a further aspect the present invention, a traffic incident detection system includes a traffic management center processor connected to a data network, and a plurality of unique vehicle data readers connected to the data network such that uniquely identified data is read from each of a plurality of vehicles. The system further includes a correlation processor, where the uniquely identified data is correlated to obtain a count of overdue vehicles and early arriving vehicles, and an incident detection processor. With such an arrangement, a traffic management system is provided that can detect incidents without a requirement for closely spaced sensors.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing features of this invention, as well as the invention itself, may be more fully understood from the following description of the drawings in which:

FIG. 1 is a schematic diagram of a roadway having traffic probe readers arranged to detect a traffic incident;

FIG. 2 is a block diagram of an incident detection system according to the invention;

FIG. 3 is a flow diagram illustrating the steps of reading and correlating uniquely identified data; and

FIG. 4 is a flow diagram illustrating the steps of detecting an incident.

DETAILED DESCRIPTION OF THE INVENTION

Referring now to FIG. 1, an incident detection system 100 includes a traffic management center (TMC) 34 connected to a plurality of traffic probe readers (TPR's) 20a - 20n (generally denoted TPR 20) along a roadway 10 separated by interval 15. The roadway 10 includes a number of segments 11 (generally designated S_i 11) which are typically located between a pair of TPR's 20 or other devices that can detect vehicles. It should be appreciated that the length of interval 15 between each pair of TPR's 20 is only approximate and does not have to be uniform between TPR's 20. The interval 15 is set to minimize the required number of TPR's 20 subject to incident detection time constraints. In one embodiment, the interval 15 is set to five kilometers. A plurality of the vehicles 12a - 12m (generally denoted vehicles 12) traveling on roadway 10 can each include a transponder 16. Vehicles 12 so equipped can include automobiles, truck, buses, service vehicles and any type of vehicle traveling on the roadway. In operation, TPR 20a will detect vehicle 12 by reading transponder 16 when vehicle 12 enters a reading zone surrounding TPR 20.

As shown in FIG. 1, an incident includes a bus 14 blocking traffic causing a queue (a backlog) of vehicles (12c, 12d, 12e and 12n) to form on segment 11 (denoted S_i) on roadway 10. Vehicle 12a is shown entering the reading zone of TPR 20a. Vehicle 12c entering segment S_i 11 at a earlier time was detected by TPR 20a and has traveled a further distance on the roadway 10 to the traffic queue caused by a traffic accident involving bus 14. TPR 20b which is located further down the roadway will not detect vehicle 12c until the traffic incident is cleared and vehicle 12c passes within the detection zone of TPR 20b. At some point in time after the incident occurs, the incident detection system 100 calculates that vehicle 12c is overdue at TPR 20b, as described below in conjunction with FIG. 3. By determining that a number of vehicles are overdue, the incident detection system 100 can detect the incident and declare that an incident has occurred before vehicle 12c and other overdue vehicles 12 arrive at TPR 20b. This novel detection method does not need to track every vehicle 12 because it indirectly senses the incident with cause a backlog without having to directly sense the backlog itself. The novel method does not require that every vehicle 12 have a transponder 16 and can accommodate vehicles 12 that stop along the roadway.

Referring now to FIG. 2, a block diagram of the incident detection system 100 is shown. The incident detection system 100 includes a plurality of TPR's 20a - 20n disposed at known intervals along the roadway 10. (FIG. 1) Each TPR 20 includes an automatic vehicle identification (AVI) reader 22. The TPR's 20 can be connected via a data network to the traffic management center (TMC 34) or to a roadside toll collection device (RTC) 26. The RTC's 26 can be connected to the TMC 34 or other RTC's 26. It should be appreciated that various network configurations and data transmission protocols can be used to transfer data generated at the TPR's 20 to the TMC 34 and that a direct connection from each TPR 20 to the TMC 34 is not required.

The TMC 34 includes an incident detection processor 32 and a correlation processor 36. The blocks denoted "processors" can represent computer software instructions or groups of instructions performed by a processing apparatus or a digital computer. Such processing may be performed by a single processing apparatus that may, for example, be provided as part of the TMC 34 such as that to be described below in conjunction with method described in FIG. 3. Alternatively, the processing blocks represent steps performed by functionally equivalent circuits such as a digital signal processor circuit or an application specific integrated circuit (ASIC). An optional incident detection processor 32' and an optional correlation processor 36' can be included in each of the RTC's 26 in order to distribute the data correlation and incident detection functions throughout the incident detection system 100.

The incident detection system 100 can also include a plurality of toll gateways (TG's) 24 which can be connected to an RTC 26, induction sensors 28, automatic vehicle identification (AVI) readers 22 or license plate readers 30. The TG's 24 equipped with a speed detection sensor 23 can measure the instantaneous speed of a vehicle 12 equipped with a transponder 16 at locations where the vehicle 12 is not required to stop in order for the toll collection transaction to occur.

30

The incident detection system 100 can operate with several types of transponders including but not limited to transponders operating under a time division multiple access (TDMA) transponder standard ASTM V.6/PS111-98, the CEN 278 standard, and the

Caltrans Title 21 standard. Some transponders support writable memory, and this feature can be used to support distributed processing of the AVI data as described below.

In operation, TPR's 20, in conjunction with TG's 24, are able to individually
5 identify each vehicle 12 based on its unique transponder 16 identification code (ID).
Thus, data from multiple locations can be linked together to derive a fairly accurate
estimate of travel conditions. The novel approach described herein makes more use of
the available AVI data than previously contemplated in conventional systems. By
indirectly sensing the queue which forms at an incident, the inventive method allows the
10 TPR's 20 to be preferably spread out at five km intervals along the roadway while still
achieving objectives to detect traffic incidents within a minimum specified period, for
example five minutes. TPR's 20 are not needed at Toll Gateway locations as each TG 24
includes full TPR 20 functionality.

15 Each TG 24 and TPR 20 preferably contains an AVI reader capable of reading
the unique thirty-two bit ID assigned to each transponder 16. It should be appreciated
that the incident detection system 100 can use a variety of transponders 16 and AVI
readers 22 and is not limited to readers with a thirty-two bit ID. In order to avoid
erroneous reading, the transponders 16 should preferably be identified by a unique ID.

20

The roadside equipment, TPR's 16 and TG's 24, process each transponder's
16 data to determine the following information: (i) an indication with high confidence
that the indicated transponder 16 crossed the detection location in the expected
direction of travel; (ii) the date and time of detection in Universal coordinated time
25 (UTC); (iii) the difference in time from previous detection to current detection; (iv)
the location of previous detection (this information is stored in the transponder 16
memory); (v) the registered vehicle classification; (vi) the instantaneous vehicle speed
collected at Toll Gateways 24 only; and (vii) an estimate of vehicle occupancy over
the full-width of the roadway which is collected at Toll Gateways 24 only and
30 typically detected by induction loop sensors. It should be noted that the system
preferably operates using universal coordinated time (UTC) that is referenced to a
single time zone. Preferably, the link or segment travel time, which is the difference
in time between the time of a vehicle detections at the start and end of a segment 11,
is accurate to within \pm one second. Additionally, Toll Gateways 24 can determine the

count, speed, and occupancy of non-AVI vehicles which can be extrapolated to augment the AVI data produced by TPR's 20. It should be appreciated that the incident detection system 100 can be used with an open-road automatic vehicle identification tolling instead of traditional toll booths, and that the incident detection system 100 is not limited to any specific toll collection method or roadway configuration.

Typically the uniquely identified data, for example data associated with vehicles 12, and other data such as induction loop data and license plate data are transmitted over data network including fiber optics or wire transmission lines. The incident detection system 100 can also use wireless communications to collect data.

The incident detection system 100 can be included as a subsystem in an Electronic toll collection and traffic management system (ETTM) which processes toll transactions and includes additional traffic management functions.

Referring now to FIG. 3, a flow diagram illustrating the steps of reading and correlating uniquely identified data is shown. Steps 40 to 56 process uniquely identified data after it is read by AVI readers 22, loop sensors 28 and license plate readers 30 included in the incident detection system 100. It should be appreciated that the data can be processed in any one or a combination of several components in the system including TPR's 20, TG's 24, RTC's 26, correlation processors 36 and 36', incident detection processors 32 and 32' and TMC 34. Additional data that are not uniquely identified with a vehicle, for example, induction loop sensor data and roadway occupancy data can also be processed to modify the operation of the incident detection system 100.

At step 40, uniquely identified AVI data identifying each vehicle with a transponder 16 is read continuously as vehicles containing transponders 16 pass within range of AVI readers 22 connected to TPR's 20 or TG's 24. Other uniquely identified data can also be collected by automatic license plate readers 30 and by an operator entering manually read license plate data.

At step 41, additional data such as the current UTC time, and the segment number of the roadway segment being entered can be optionally written into the memory location

of the transponder 16 if the transponder 16 supports this feature. The transponders 16 are typically pre-programmed with information identifying the issuing agency and registered vehicle classification. The UTC time and a roadway segment identifier are preferably written to the transponder as the vehicle 12 passes within range of the AVI readers 22.

5

At step 42, AVI data collected from AVI readers 22 connected to TPR's 20 and TG's 24 are correlated based on AVI unique transponder ID's. Data correlation processing can optionally occur within a correlation processor 36' connected to RTC's 26 or all of the raw AVI data can be sent to the TMC 34 and correlation processor 36. It should be appreciated that the data correlation process can be distributed among the various processing elements of the incident detection system 100 so that data is preprocessed before being sent to the TMC 34. After the data is collected and correlated in steps 40 and 42, the TMC 34 determines how many AVI equipped vehicles 12 are currently traveling within a given road segment and how much time has elapsed since each vehicle entered each segment. Correlation of the AVI data is accomplished by matching reports from adjacent sensors using the unique transponder ID's. When a report for a given transponder ID has been received from the sensor at the start of a segment 11, but not the sensor at the end of the segment 11, it is assumed that the vehicle is still traveling the given segment 11.

20

In steps 44-48, an expected speed and expected travel time for the next segment 11 of the roadway are calculated for the vehicle 12 that has been detected. In step 44, the expected speed for each identified vehicle 14 is calculated. For each vehicle V_i entering a road segment 11 denoted S_j starting Toll Gateway 24, a start speed is given by:

25 $StartSpeed[V_i, S_j] = \text{instantaneous speed of } V_i \text{ at the start of } S_j;$

Where:

S_j denotes the segment 11 starting with Toll Gateway 24; and

V_i denotes a vehicle 12 identified by Toll Gateway's 24 AVI reader 22.

The Toll Gateway 24 can measure the speed of a vehicle as it passes without stopping.

30

For each vehicle 12 denoted V_i entering a road segment 11 denoted S_j that starts with a TPR 20 the starting speed for the segment 11 is determined from the average speed over the prior segment since a TPR 20 can not measure instantaneous

speed, and is calculated by :

$StartSpeed[V_i, S_j]$ = average speed of V_i over prior segment from S_{j-1} to S_j , computed from the length of segment S_{j-1} divided by the time to complete the segment...

- 5 In step 46, the TMC 34 computes the expected speed of each vehicle V_i to be the minimum of its speed as it enters a segment and the legal speed limit. The expected travel time is calculated as the length of the segment 11 divided by the calculated expected speed, using the following equations:

$$ExpSpeed[V_i, S_j] = \min(StartSpeed[V_i, S_j], HighSpeed[S_j])$$

$$ExpTime[V_i, S_j] = \frac{Length[S_j]}{ExpSpeed[V_i, S_j]}$$

- 10 where,

$HighSpeed[S_j]$ = average legal speed limit over the segment starting at S_j

$Length[S_j]$ = length of the segment starting at S_j

- The incident detection system 100 is designed to allow extra time for a vehicle to traverse a segment 11 to avoid generating false alarms. When an actual incident
15 occurs, it should affect a large enough number of vehicles that the incident can be detected. The incident detection system 100 allows the expected travel time to vary by vehicle, in order to account for effects such as slow moving trucks and even increase the expected travel time when a truck enters a road segment 11 containing a large grade. The expected travel time is never faster than the posted speed limit to
20 allow for vehicles 12 that may be traveling faster than the speed limit at the start of a segment 11 but slow down within the segment 11 due to the presence of law enforcement.

- At step 48, a database is updated to reflect that vehicle 12 has entered a new
25 segment 11 along with the calculated expected speed and travel time to the next AVI reader 22. It should be appreciated that the database could be implemented as a computer database, or indexed tables. The distributed approach preferably uses a table with one row for each transponder, including the time it passed the last reader, speed, and expected time at next reader. With a centralized approach a database is
30 used instead of indexed tables.

In decision block 50, a test is made to determine if the recently detected vehicle 12 was considered overdue. If the vehicle was being counted as overdue, the vehicle 12 is removed from the overdue list in step 52.

5

In decision block 54, a test is made to determine if the recently detected vehicle 12 has arrived early. The determination of an early arriving vehicle 12 is significant to incident determination in previous segment because early arrivals can be caused by incidents in prior segments 11 that abnormally reduce traffic in subsequent sections allowing numerous early arrivals. The early arriving vehicles 12 can enter segments 11 via an on ramp or an interchange.

In a distributed correlation embodiment, the early arrival information is made available to RTC's 26 processing data from previous segments 11 because the actual early arrival might be detected by a TPR 20 or TG 24 which is controlled by a separate RTC 26.

If an incident occurs just downstream of a Toll Gateway and causes a backup to the Gateway, the algorithm will detect the incident by noting that the average vehicle speed through the Gateway is slow while the average link travel times are faster than expected for heavy congestion. Declaring an incident based on such "early arrivals" improves detection performance for incidents just beyond a Toll gateway. This is important because Toll Gateways are located near merge points which tend to have a higher rate of accidents.

25

It is also possible that an incident near a TPR 20 could cause slow travel times for the segment 11 prior to the TPR 20 and corresponding early arrivals for the next segment 11. This effect is due to the fact that TPR's 20 are not capable of measuring instantaneous speed. However, the primary method of detecting such incidents is through the test for overdue vehicles 12 and it is expected that the early thresholds would normally not be used for segments 11 following a TPR 20. The early thresholds are normally only used for segments following a toll gateway that can measure instantaneous speed. For segments following a TPR, incidents are only detected by counting the overdue vehicles. Steps 40 - 56 are repeated as additional

30

AVI data are collected.

Referring now to FIG. 4, a flow diagram illustrating the steps of detecting an incident is shown. Steps 60 - 86 are repeated on a periodic basis preferably at least every twenty seconds, for each segment 11 in the roadway that is being monitored, to determine the number of vehicles 12 potentially affected by incidents along the roadway. At step 60, for each segment 11, the count of overdue and early arriving vehicles is reset to zero. At step 62, the data for each of the vehicles 12 known to have entered without leaving and those vehicles that have been reported early is collected.

In steps 64 - 86, an incident can be declared in either of the following ways: (i) the count of vehicles overdue by more than the applicable threshold exceeds the a predetermined sample size; or (ii) the count of vehicles that complete the segment 11 early by more than the applicable threshold over the last three minute time interval exceeds a predetermined sample size. The sample size thresholds and time thresholds can be dynamically adjusted to vary by segment 11 and other traffic conditions as described below.

In decision block 64, a determination is made whether a vehicle known to be in segment 11, S_i , is overdue by comparing the UTC time to the expected arrival time of the vehicle at the end of the segment 11, S_i . If the vehicle is overdue, processing continues in decision block 66 otherwise processing continues at step 74 to determine if the vehicle has arrived early at the end of the segment 11.

In decision block 66, the amount of time that a vehicle 12 is overdue to arrive at a TPR 20 is compared to a predetermined threshold. The elapsed time a vehicle has been traveling in a segment 11 is compared to an expected segment 11 travel time for each vehicle to determine if the vehicle is overdue and by how much time. The magnitude of the threshold is increased during periods of high total vehicle road usage to avoid declaring an incident due to transient waves of congestion. If the vehicle is not overdue by an amount of time greater than the threshold, processing continues in decision block 68 where a test is made to determine if there are more data representing vehicles 12 in the present segment 11 to process.

The overdue time for vehicle V_i is calculated as follows. At any given time t_c in step 66, if a vehicle V_i has not been detected by the downstream sensor starting segment S_{j+1} , within the expected arrival time $ExpTime[V_i, S_j]$, the vehicle 12 is initially placed been placed on an overdue list. Using the current time and the time vehicle 12 started the segment 11, the time that the vehicle 12 is actually taking to complete the segment 11 is compared to the time the vehicle 12 should have taken to complete the segment 11. Expressed as a percentage of the time the vehicle 12 should have taken to complete the segment 11, the vehicle is overdue by:

$$10 \quad Overdue[V_i, S_j, t_c] = \frac{t_c - StartTime[V_i, S_j] - ExpTime[V_i, S_j]}{ExpTime[V_i, S_j]} \times 100\% \quad (\text{Equation 1})$$

where,

t_c = the current UTC time;

$StartTime[V_i, S_j]$ = time that V_i entered the segment starting at S_j ; and

$ExpTime[V_i, S_j]$ = time that V_i should have taken to complete the segment with sensor

15 S_j .

If the overdue time for a vehicle exceeds the predetermined threshold, a test is made in decision block 70 to determine if the vehicle 12 is overdue by more than a predetermined cutoff time. The cutoff time is preferably measured starting at the time that vehicle 12 exceeds the overdue threshold rather than at the expected time of arrival. This reduces the need to artificially increase the predetermined cutoff time for a high overdue threshold.

Service stations located along the roadway can be accommodated in the algorithm by increasing the required sample size for declaring an incident on just those sections of Highway. The test in decision block 70 can disregard occasional long link travel times to allow for service station stops, breakdowns, and law enforcement stops. If the vehicle 12 is not overdue past the cutoff time, the count of overdue vehicles is incremented in step 72.

30

After a vehicle becomes overdue by more than the predetermined cutoff time, preferably five minutes in one embodiment, it is ignored for the remainder of that segment 11 to avoid declaring an incident due to a few vehicles stopping for some reason unconnected to a traffic incident. This nominal cutoff threshold is adjusted during initial
5 system setup to minimize falsely detected incidents.

The overdue count is decremented by the number of vehicles 12 which are ignored for a particular segment 11 when the overdue time exceeds the cutoff threshold. Also as each overdue vehicle is detected by the reader at the end of the
10 current segment 11, that vehicle is remove from the count of overdue vehicles.

The incident detection system 100 is designed to detect incidents that result in a queue build-up, not events such as a single vehicle breaking down without blocking traffic. When an actual incident occurs, there will be a continuing stream of overdue
15 vehicles to trigger an incident determination in response to the comparison in decision block 82 described below.

In decision block 74, a check is made to see if the vehicle 12 has arrived early as determined in step 56. If the vehicle has arrived early processing continues at
20 decision block 76 otherwise data collection continues at step 40.

In decision block 76, the difference between the expected and actual link travel time of any vehicle which arrives early at a TPR 20 (referred to as the early arrival time) is compared to a predetermined "Time Early" threshold. The "Time
25 Early" time in step 76 is the difference between the actual arrival time and the expected arrival time. This is calculated at time of arrival of vehicle 12 and does not change. If the early arrival time for a vehicle exceeds the predetermined threshold, a test is made in decision block 78 to considered vehicle arriving early over some interval of time, for example the last three minutes.
30

The maximum of the actual time the vehicle 12 took to complete a segment 11, and the time to travel the link at the legal speed, is compared to the time the vehicle 12 should have taken to complete the segment 11. Expressed as a percentage of the time the vehicle 12 should have taken to complete the segment 11, the

difference between the expected and actual link travel time for a vehicle is given by:

$$Diff[V_i, S_j] = \frac{\max\left(ActualTime[V_i, S_j], \frac{Length[S_j]}{HighSpeed[S_j]}\right) - ExpTime[V_i, S_j]}{ExpTime[V_i, S_j]} \times 100\%$$

(Equation 2)

This difference is used to calculate early arrival time and can be used to
 5 calculate histogram of vehicle arrival times. If AVI correlation occurs at the RTC's
 26, only a histogram of the number of overdue vehicles is periodically sent to the
 TMC 34, not the data for each individual vehicle. In the distributed correlation
 embodiment, each RTC sends information on each transponder that passes its last
 sensor to the next downstream RTC 26. The RTC's 26 have the ability to
 10 communicate directly with each other.

The history of the actual link travel time for vehicles and the difference from
 the expected travel time can be retained by the incident detection system 100. This
 information can be displayed to the operator to assist in manual incident detection and
 15 can be used for fine tuning the automated algorithm. Instead of saving the data for
 every vehicle that traverses a segment 11, summary histograms can be stored.

The "Has been early for time" in step 78 is the difference between the actual
 arrival time and the time at which the evaluation is being made. This time increases
 20 on subsequent evaluations until it finally exceeds a cutoff time. To declare an
 incident based on early arrivals, preferably only vehicles arriving early within the
 cutoff time (for example the previous three minutes) are considered. It should be
 appreciated that the cutoff time can be adjusted a function of segment 11 road usage
 and configuration. A list is maintained of each early arriving vehicle and the time at
 25 which it arrived. After a vehicle has been on the list for longer than the cutoff time,
 preferably three minutes, it is removed. If the vehicle has arrived early and has
 arrived within the cutoff interval, then the count of early arriving vehicles over a set
 time interval is incremented in step 80.

30 The magnitude of the time overdue and time early thresholds are increased
 during periods of high total vehicle road usage to avoid declaring an incident due to

transient waves of congestion.

The tests for declaring an incident occur in decision blocks 82 and 84. In decision block 82 the number of overdue vehicles over a predetermined interval is compared to a minimum number of vehicles (the overdue sample threshold). If the count of overdue vehicles 12 is greater than the overdue sample threshold an incident is declared in step 86. If the overdue count does not exceed the sample threshold, a second test is made in decision block 84 for early arriving vehicles 12. When an incident is declared in a given segment 11, the detection logic is modified to avoid false incident detection in upstream and downstream segments 11.

In decision block 84 the number of vehicles 12 that have arrived early at a TPR 20 over a predetermined interval is compared to a minimum number of vehicles (the early sample threshold). If the count of overdue vehicles 12 is greater than the early sample threshold an incident is declared in step 86. If the early count does not exceed the early sample threshold, the overdue and early counts are reset at step 60 and data collection repeats at step 62. It should be appreciated that an incident can be detected in either the TMC 34 in incident detection processor 32 or an RTC 26 in incident detection processor 32'.

Both the overdue and early sample thresholds vary according to the current road usage. The sample thresholds are increased during periods of high AVI vehicle road usage to avoid declaring an incident based on a small percentage of the total traffic. The magnitude of the thresholds are increased during periods of high total vehicle road usage to avoid declaring an incident due to transient waves of congestion. The time thresholds are dynamically adjusted to vary by segment 11 and other traffic conditions. For example, if over a recent five minute interval the total traffic per lane at start of a segment 11 is less than 100 vehicles, the time threshold for overdue vehicles is preferably set as a percentage of the expected time equal to ten percent. The corresponding threshold for early arriving vehicles expressed as a negative percentage is set to minus thirty percent. As the traffic per lane on the segment 11 increases to greater than 150 vehicles, the time threshold for overdue vehicles is increased to twenty percent and the magnitude of the time threshold for early arriving vehicles is increased to minus fifty percent respectively. As described

above, these initial nominal values are tuned to provide fewer false incident detections.

The early sample threshold is chosen to be proportional to the selected early
5 time threshold in that shorter times require smaller sample sizes to maintain the same
incident detection rate. Longer times and sample sizes increase the time to detect an
incident but reduce the false alarm rate. The early sample threshold is determined
based on the required incident detection rate and false alarm rate. Then, the
appropriate time threshold is calculated. Finally, the parameters are tuned based on
10 operational experience. The overdue criteria are calculated in a similar manner.

In an alternate embodiment, distributed processing in the RTC's is used to
correlate the data. The RTC's 26 can retrieve data stored in transponders 16 to use
information collected in a prior segment. In this embodiment, the RTC 26 determines
15 the number of vehicles within a range of overdue times as a percentage of the
expected arrival times. This information is transmitted to the TMC 34 on a periodic
basis.

Use of the transponder 16 memory can reduce the amount of data that needs to
20 be sent from one RTC 26 to the next as well as RTC processing overhead, but the
same performance can be achieved in a system with non-writable transponders if
sufficient inter-RTC communication and processing resources are available.

The advantage of distributed processing is a reduction in data processing and
25 transmission because all of the individual AVI data does not have to be sent to the
TMC 34. This also saves TMC 34 processing resources. The RTC 26 creates a
histogram of Vehicles Currently Overdue. Table I shows an example of a histogram
generated by RTC 26. These histograms are updated on a periodic basis, preferably
every thirty seconds and sent to the TMC 34. The first entry in Table I indicates that
30 at the time this set of data was calculated there were 80 vehicles that have not arrived
at the end of the segment 11 where they are current located and they are within 5% to
10% overdue. For example, vehicle 12_k has an expected travel time of 100 seconds
for segment 11_i and vehicle 12_k transponder 16 contained data indicating that it
entered segment 11_i at UTC time 12:00.00. If the current UTC time is 12:01:46,

vehicle 12_k has been traveling in segment 11_i for 106 seconds and is currently 6 % overdue. As described above the number of vehicles in each overdue range of overdue percentages preferably excludes vehicles overdue more than 5 minutes. If a vehicle 12 traveled in a segment for 125 seconds and the expected travel time was 100 seconds, the vehicle 12 would be counted in the 20% to 25% bin.

Time Overdue %	Number of Vehicles
5% to 10%	80
10% to 15%	40
15% to 20%	20
20% to 25%	5
...	...
>100%	0

Table I. Vehicles Currently Overdue

10

The incident detection system 100 can also operate where the roadway includes on-ramps, off-ramps, interchanges and free sections of roadway.

15 To declare an incident on a section of road that includes an on-ramp, the threshold for overdue vehicles is preferably increased to forty percent regardless of traffic flow.

Preferably, a Toll Gateway should be located 500 meters beyond the beginning of the merge point of each on-ramp to provide updated instantaneous speed for each AVI vehicle. In cases where this is not practical, an on-ramp should be followed by two

20 closely spaced TPR's 20. For the section of road between the TPR's 20, the threshold for overdue vehicles should be increased to 50% or more regardless of traffic flow to lessen the probability of declaring a false incident due to congestion caused by the on-ramp. The close TPR 20 spacing will make up for the loss in performance caused by

25 increasing the threshold. Incident detection by counting early vehicles is unaffected by the presence of an on-ramp within a road segment 11.

A modified algorithm is used for segments 11 containing an off-ramp in a configuration where vehicles 12 can exit the roadway without being detected. To maximize detection performance, a TPR 20 should be located just before each off-ramp to increase the portion of the roadway on which the baseline algorithm can be used and to shorten the section within the interchange on which the modified algorithm must be used.

It should be appreciated that if a TPR 20 can be placed on the off-ramp, the exiting vehicles 12 can be detected and the method described above can be used to detect incidents by recognizing that the vehicles 12 detected leaving via the off-ramp are not overdue and the normal end of segment 11.

To declare an incident in a section of the roadway that includes an off-ramp without a TPR placed on the off-ramp, it is preferably required that the number of vehicles completing the segment in less than the allowed time (the off-ramp time threshold) over the previous one minute interval does not exceed a predetermined count threshold. This test replaces the overdue test described above. For example, if between fifty and one hundred vehicles start a segment 11 in the most recent five minute interval, the arrival of three vehicles within a one minute period at the TPR 20 located at the end of the segment before the off-ramp would suppress incident detection at the normal end of the segment 11. If fewer than three vehicles arrive within the one minute period, an incident is declared.

In a further example, if two hundred fifty or greater number of vehicles 12 start segment 11 in the most recent five minute interval, the arrival of fifteen or more vehicles at the end of segment 11 would suppress incident detection. If fewer than fifteen vehicles arrive within the one minute period, an incident is declared. This prevents an incident from being declared when a reasonable number of vehicles are completing segment 11 having an unmonitored off-ramp within the allowed time. When a vehicle 12 completes a segment 11, it is counted as arriving within the allowed time if the following condition is satisfied:

$$Diff[V_i, S_j] < Off-RampTime Threshold,$$

Where

$Diff[V_i, S_j]$ is derived from Equation 2; and

the *Off-Ramp Time Threshold* can vary by segment.

Incident detection by counting early vehicles is unaffected by the presence of an off-ramp within a road section except that the early vehicle sample size threshold for such sections is slightly reduced.

For a typical interchange with an off-ramp preceded by a TPR 20 and one or two on-ramps followed by a Toll Gateway, the modified algorithm and sample sizes as described above will be used with a time threshold of 40%.

10

A free section of the roadway is a section where no tolls are collected from any vehicle. It is expected that the number of vehicles 12 equipped with transponders 16 as a percentage of the total vehicles 12 (referred to as AVI penetration) might be a smaller in a free section. Assuming a TPR 20 is located at the start of the free section and another one is near the end of the section, the baseline algorithm will be preferably used with a time threshold of 80%. Early vehicle incident detection logic should be disabled for the road segment 11 immediately following the free section to avoid erroneously declaring an incident as the result of congestion easing.

20

The threshold values described in the examples above are only applicable to a particular roadway configuration. Operating threshold values will vary depending on the roadway configuration and capacity. The nominal threshold values are adjusted during initial system setup to eliminate falsely detected incidents.

25

All publications and references cited herein are expressly incorporated herein by reference in their entirety.

Having described the preferred embodiments of the invention, it will now become apparent to one of ordinary skill in the art that other embodiments incorporating their concepts may be used.

30

What is claimed is:

CLAIMS

- 1 1. A method for detecting incidents along a roadway comprising the unordered
2 steps of:
 - 3 arranging a plurality of readers at intervals along a roadway for reading
 - 4 uniquely identified data from each of a plurality of vehicles;
 - 5 correlating the data with previously read data to obtain information on each of
 - 6 the plurality of vehicles;
 - 7 determining the number of vehicles potentially affected by incidents along the
 - 8 roadway; and
 - 9 comparing the number of vehicles potentially affected by incidents to a sample
 - 10 threshold.
- 1 2. The method of claim 1, wherein the plurality of readers comprises a plurality
2 of traffic probe readers.
- 1 3. The method of claim 1, wherein each of the plurality of readers is spaced at
2 least five kilometers from an adjacent reader.
- 1 4. The method of claim 1, wherein the information is at least one of:
2 a vehicle speed;
3 an expected vehicle travel time between two adjacent readers; and
4 an expected arrival time of each of the plurality of vehicles at one of the
5 plurality of readers.
- 1 5. The method of claim 1, wherein the step of determining the number of
2 vehicles potentially affected by an incident further comprises the step of determining
3 the expected time for each of the plurality of vehicles to be detected by a particular
4 one of the plurality of readers.
- 1 6. The method of claim 5, wherein the step of determining the number of
2 vehicles potentially affected by an incident further comprises the steps of:
 - 3 determining the amount of time each vehicle time is overdue past the expected
 - 4 detection time; and

5 comparing an amount of time each vehicle time is overdue to a predetermined
6 threshold.

1 7. The method of claim 6, wherein the predetermined threshold is adjusted
2 according to the roadway usage.

1 8. The method of claim 5, wherein the step of determining the number of each of
2 the plurality of vehicles potentially affected by an incident further comprises the steps
3 of:

4 determining the amount of time each vehicle time is earlier than the expected
5 detection time; and

6 comparing an amount of time each vehicle time arrived early to a
7 predetermined threshold.

1 9. The method of claim 8, wherein the predetermined threshold is adjusted
2 according to the roadway usage.

1 10. The method of claim 1, further comprising detecting an incident in response to
2 the number of each of the plurality of vehicles potentially affected by an incident
3 exceeding the predetermined sample threshold.

1 11. The method of claim 10, wherein each of the plurality of vehicles potentially
2 affected by an incident is overdue at one of the plurality of readers.

1 12. The method of claim 10, wherein each of the plurality of vehicles potentially
2 affected by an incident has arrived early at one of the plurality of readers.

1 13. The method of claim 12, wherein the number of each of the plurality of
2 vehicles potentially affected by an incident is counted over a predetermined interval.

3

1 14. The method of claim 4, wherein the arrival time of expected readings is a
2 function of the vehicle type.

1

1 15. The method of claim 1, wherein the plurality of readers comprises a
2 transponder reader.

1 16. The method of claim 1, wherein the plurality of readers comprises a license
2 plate reader.

1 17. The method of claim 1 wherein an instantaneous speed of each of the plurality
2 of vehicles is determined by a Toll Gateway sensor.

1 18. The method of claim 6, wherein the expected time for each of the plurality of
2 vehicles to be detected by reader is calculated by:

$$\text{ExpSpeed}[V_i, S_j] = \min(\text{StartSpeed}[V_i, S_j], \text{HighSpeed}[S_j])$$

$$\text{ExpTime}[V_i, S_j] = \frac{\text{Length}[S_j]}{\text{ExpSpeed}[V_i, S_j]}$$

5 where,

6 V_i is a vehicle entering a road segment S_j ;

7 $\text{ExpTime}[V_i, S_j]$ = expected time for V_i to be detected;

8 $\text{StartSpeed}[V_i, S_j]$ = starting speed of V_i at the beginning of segment S_j ;

9 $\text{ExpSpeed}[V_i, S_j]$ = expected speed over segment S_j ;

10 $\text{HighSpeed}[S_j]$ = average legal speed limit over the segment starting at
11 S_j ; and

12 $\text{Length}[S_j]$ = length of the segment starting at S_j .

1 19. The method of claim 18, wherein an overdue time for each of the plurality of
2 vehicles that has not been detected by the expected reader within the expected time, is
3 calculated by:

$$\text{Overdue}[V_i, S_j, t_c] = \frac{t_c - \text{StartTime}[V_i, S_j] - \text{ExpTime}[V_i, S_j]}{\text{ExpTime}[V_i, S_j]} \times 100\%$$

5 where,

6 $\text{StartTime}[V_i, S_j]$ = time that V_i entered the segment starting at S_j .

1 20. The method of claim 18, wherein a difference between the expected and actual

- 2 link travel time for each of the plurality of vehicles is calculated by:

$$Diff[V_i, S_j] = \frac{\max\left(ActualTime[V_i, S_j], \frac{Length[S_j]}{HighSpeed[S_j]}\right) - ExpTime[V_i, S_j]}{ExpTime[V_i, S_j]} \times 100\%$$

4 where:

5 $ActualTime[V_j, S_j]$ = actual time for V_i to travel over segment S_j .

1 21. The method of claim 18, wherein the starting speed of V_i is calculated by:

2 $StartSpeed[V_j, S_j]$ = average speed of V_i over a prior segment.

1 22. The method of claim 18, wherein the starting speed of V_i is calculated by:

2 $StartSpeed[V_j, S_j]$ = instantaneous speed of V_i at the start of S_j measured by a
3 toll gateway speed sensor.

1 23. The method of claim 1, further comprising the step of declaring an incident in
2 response to the number of each of the plurality of vehicles potentially affected by
3 incidents being greater than the sample threshold.

1 24. The method of claim 1, further comprising the step of excluding each vehicle,
2 that is overdue for more than a predetermined cutoff threshold measured from the
3 time that the vehicle is initially overdue, from being counted in the number of each of
4 the plurality of vehicles potentially affected by incidents.

1 25. The method of claim 1, further comprising the step of excluding each vehicle,
2 that has arrived early at the end of a roadway segment for more than a predetermined
3 cutoff threshold measured from the time that the vehicle is initially early, from being
4 counted in the number of each of the plurality of vehicles potentially affected by
5 incidents.

1 26. The method of claim 1, further comprising the step of suppressing the
2 detection of an incident in a roadway segment where the number of vehicles exiting
3 the segment of the roadway on an off-ramp over a predetermined interval of time
4 exceeds a predetermined threshold.

1 27. A method for detecting incidents along a roadway comprising the unordered
2 steps of:

3 arranging a plurality of traffic probe readers at intervals along a roadway for
4 reading a transponder disposed on a vehicle;

5 correlating the transponder readings from each of the plurality of vehicles and
6 expected readings from each of the plurality of vehicles at more than one traffic
7 probe reader; and

8 detecting incidents which result in an interruption to the flow of traffic.

1 28. The method of claim 27, further comprising the step of writing time and
2 location data into the transponder of each of the plurality of vehicles.

1 29. The method of claim 27, further comprising the step of arranging a plurality of
2 toll gateways at intervals along a roadway for reading a transponder ID disposed on
3 each of a plurality of vehicles and for determining the presence of vehicles not having
4 a transponder ID.

1 30. An incident detection system comprising:
2 a traffic management center processor connected to a data network;
3 a plurality of unique vehicle data readers connected to said data network such
4 that uniquely identified data are read from each of a plurality of vehicles;
5 a correlation processor, wherein said uniquely identified data are correlated to
6 obtain a count of overdue vehicles and early arriving vehicles; and
7 an incident detection processor.

1 31. The system of claim 30 wherein said plurality of unique vehicle data readers
2 further comprise:

3 a plurality of traffic probe readers, each of said plurality of traffic probe
4 readers having an automatic vehicle identification reader; and

5 a plurality of toll gateways, each of said plurality of toll gateways having an
6 automatic vehicle identification reader.

1 32. The system of claim 30 further comprising a plurality of roadside toll
2 collection devices coupled to said plurality of toll gateways, said plurality of traffic

3 probe readers, and said traffic management center, such that the volume of data
4 transmitted to said traffic management center is minimized.

1 33. The system of claim 30 wherein said correlation processor is connected to said
2 traffic management center processor.


1 34. The system of claim 30 wherein said correlation processor is connected to said
2 roadside toll collection device.

1 35. The system of claim 30 wherein said incident processor is connected to said
2 traffic management center processor.

1 36. The system of claim 30 wherein said incident processor is connected to said
2 roadside toll collection device.


2/4

FIG. 2

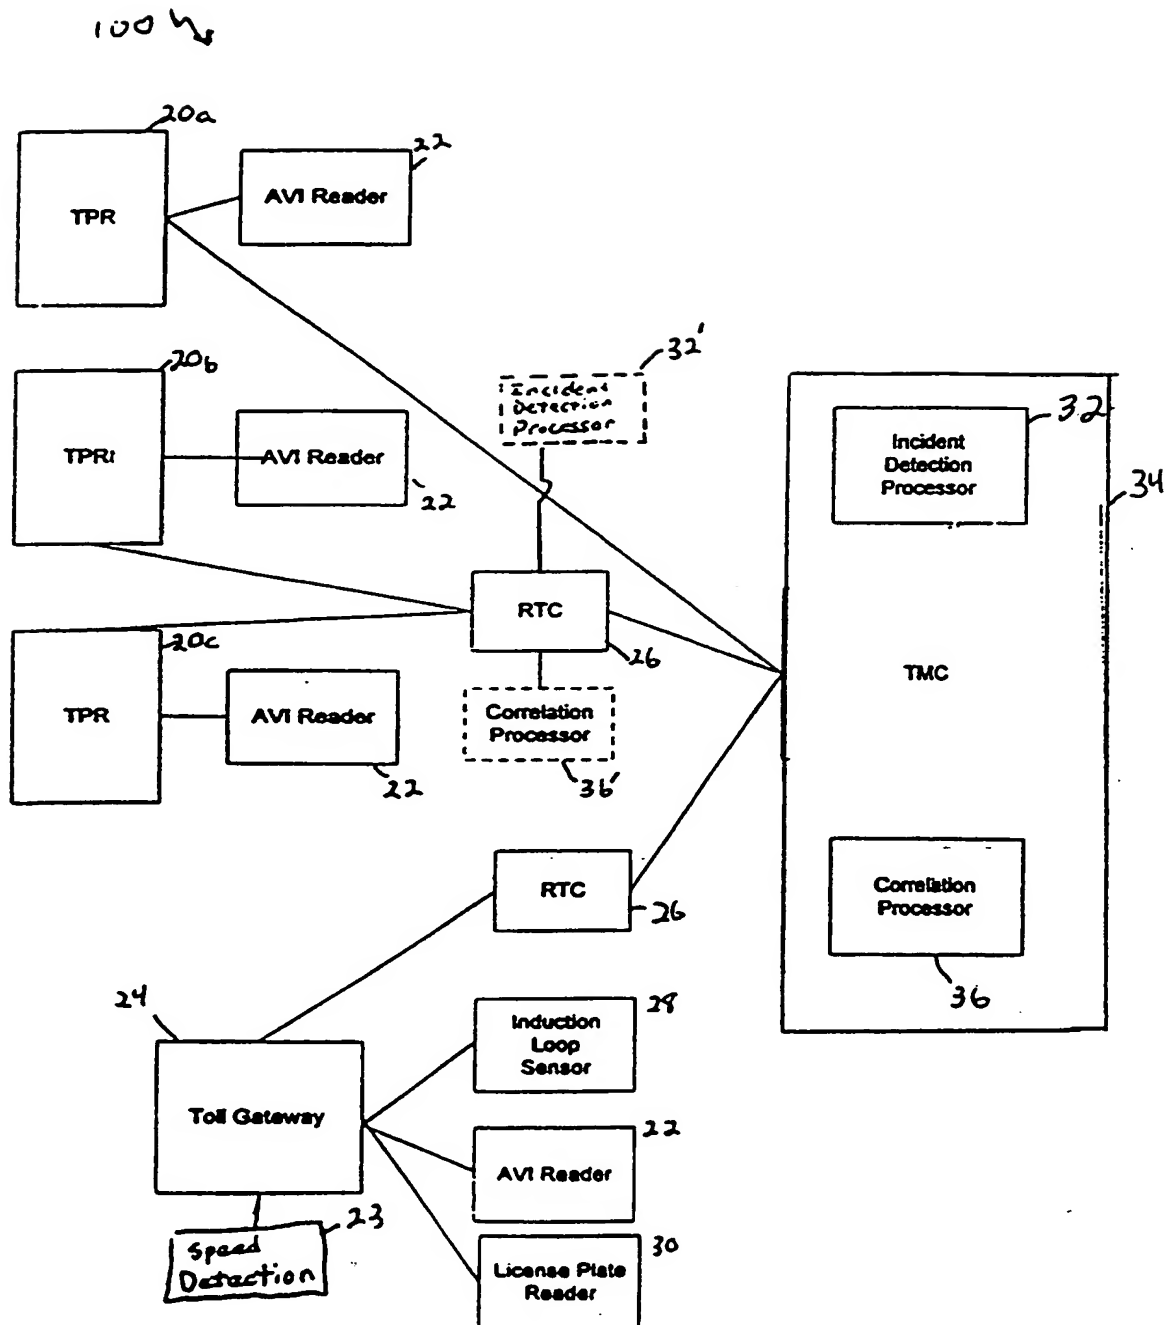


3/4

FIG. 3

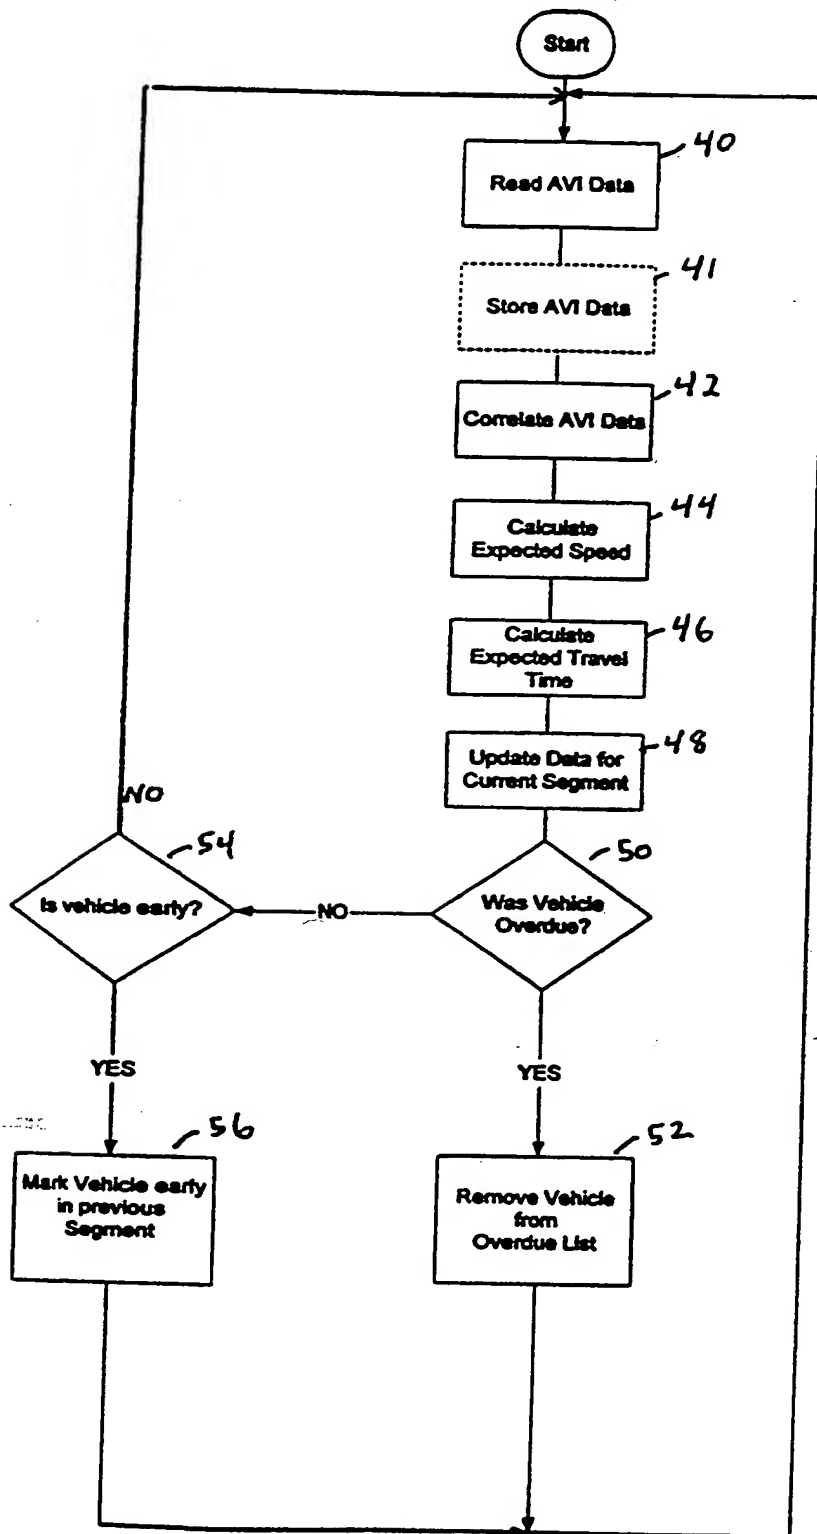

4/4

FIG. 4

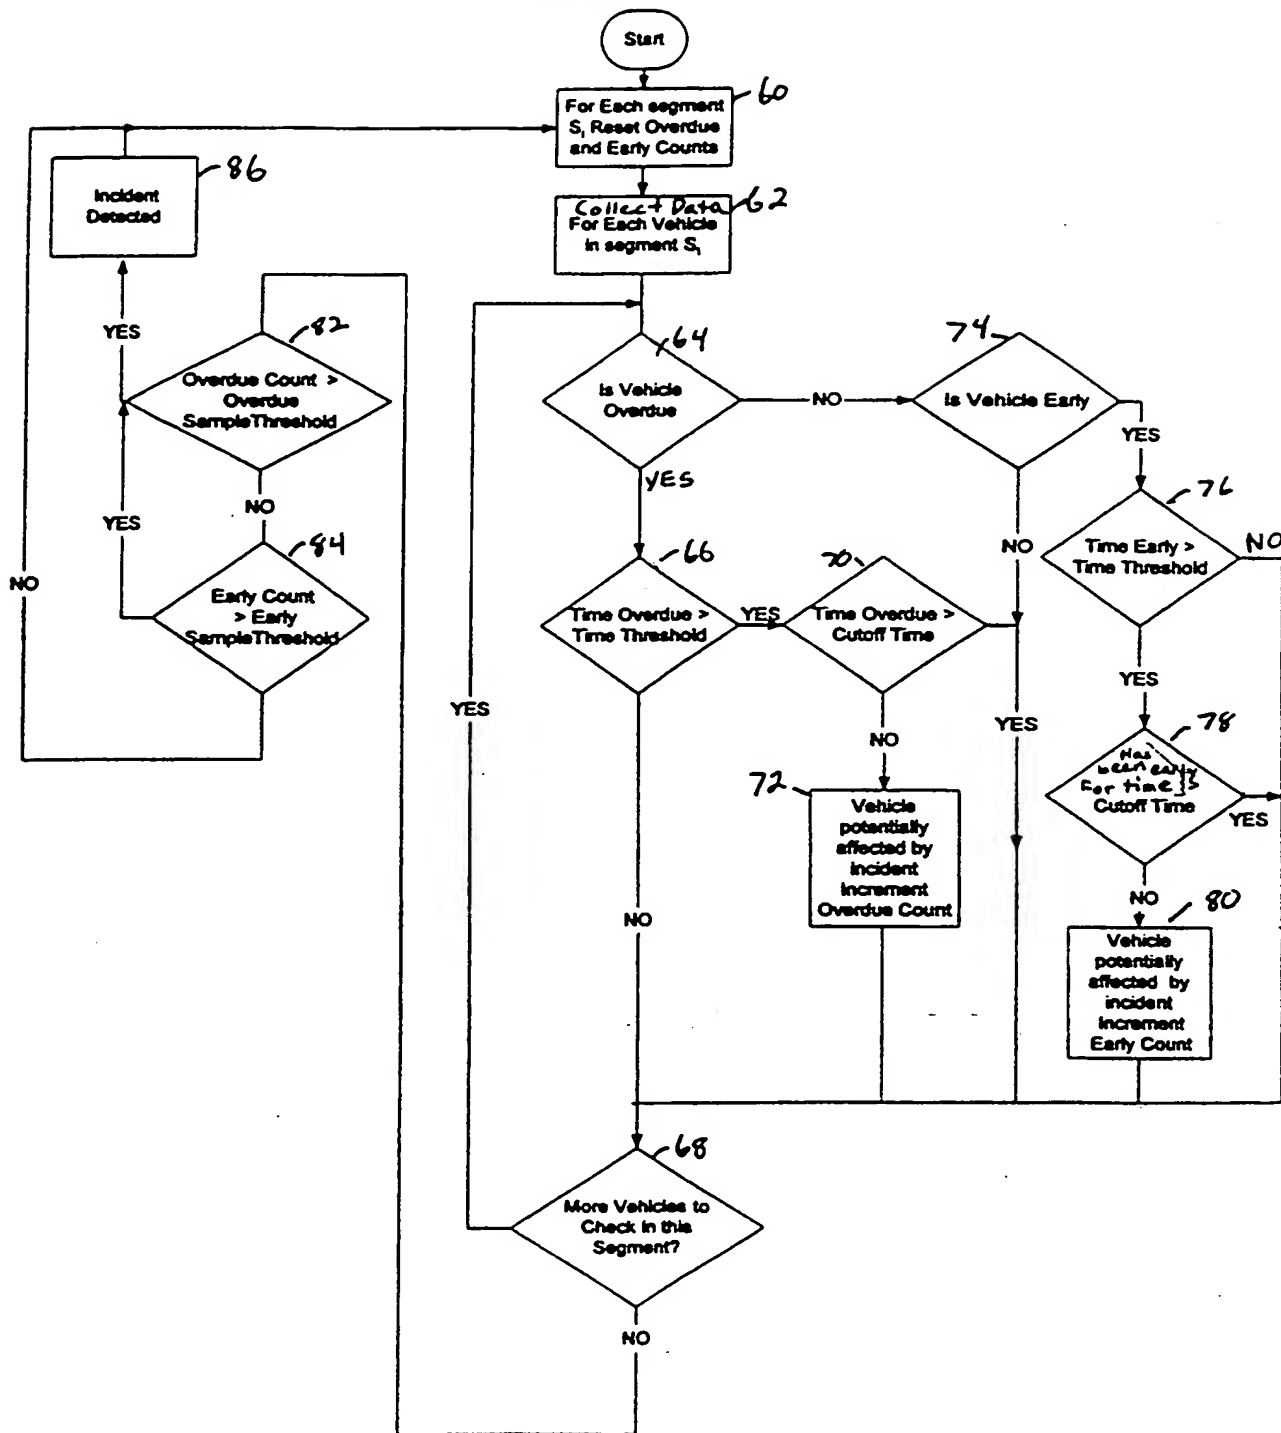

THIS PAGE BLANK (USPTO)

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/40298

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G08G1/01

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHEDMinimum documentation searched (classification system followed by classification symbols)
IPC 7 G08G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 696 502 A (BUSCH FRITZ ET AL) 9 December 1997 (1997-12-09) the whole document	1-36
A	EP 0 767 446 A (TOYOTA MOTOR CO LTD) 9 April 1997 (1997-04-09) column 3, line 2 -column 5, line 40	1-36
A	RITTICH D ET AL: "PERSPEKTIVEN DER VERKEHRSLITTECHNIK" NACHRICHTENTECHNISCHE BERICHTE, ANT NACHRICHTENTECHNIK GMB. BACKNANG, DE, no. 9, 1 April 1992 (1992-04-01), pages 111-119, XP000331875 figure 3; table 1	1-36
	--- -/-	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

30 August 2001

Date of mailing of the international search report

09/10/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040; Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Créchet, P

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 September 2001 (20.09.2001)

PCT

(10) International Publication Number
WO 01/69569 A3

(51) International Patent Classification⁷: G08G 1/01

(74) Agents: GAIMAN, Barry et al.; Daly, Crowley & Moford, LLP, Suite 101, 275 Turnpike Street, Canton, MA 02021 (US).

(21) International Application Number: PCT/US01/40298

(22) International Filing Date: 14 March 2001 (14.03.2001)

(81) Designated States (*national*): AU, IL.

(25) Filing Language: English

(84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

(26) Publication Language: English

Published:

(30) Priority Data:
60/189,858 15 March 2000 (15.03.2000) US

— with international search report


(71) Applicant: RAYTHEON COMPANY [US/US]; 141 Spring Street, Lexington, MA 02421 (US).

(88) Date of publication of the international search report:
31 January 2002

(72) Inventor: KAVNER, Douglas, M.; 2703 E. Blueridge Avenue, Orange, CA 92867 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: AUTOMATIC INCIDENT DETECTION

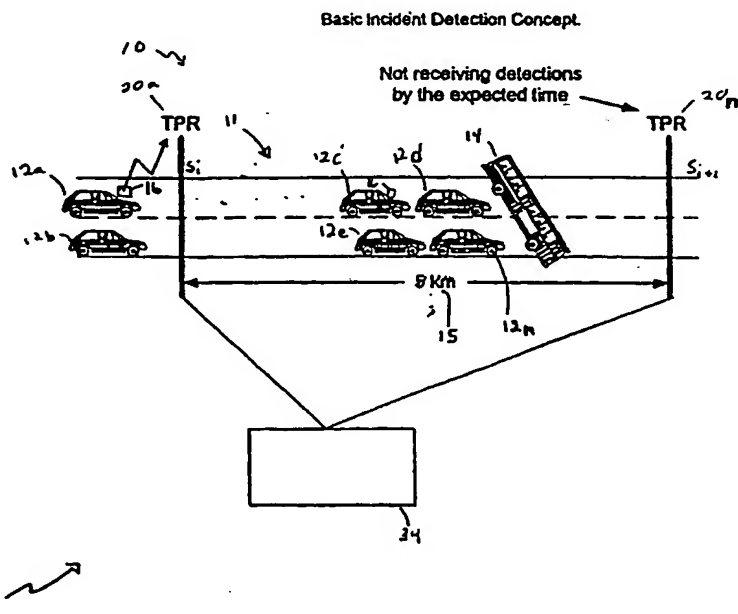

(57) Abstract: A system and method for detecting incidents along a roadway are provided. A plurality of readers are spaced at intervals along a roadway for reading uniquely identified data from each of a plurality of vehicles. These readings are correlated to obtain information on each of the vehicles and to determine the number of vehicles potentially affected by incidents along the roadway. Finally, the number of each of the vehicles potentially affected by incidents is compared to a sample threshold in order to determine if a traffic incident has occurred.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/40298

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 05, 14 September 2000 (2000-09-14) & JP 2000 057483 A (NIPPON TELEGR & TELEPH CORP <NTT>), 25 February 2000 (2000-02-25) abstract -----	
A	PATENT ABSTRACTS OF JAPAN vol. 1996, no. 02, 29 February 1996 (1996-02-29) & JP 07 254099 A (TOSHIBA CORP), 3 October 1995 (1995-10-03) abstract -----	
A	EP 0 903 916 A (MANNESMANN AG) 24 March 1999 (1999-03-24) -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/40298

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5696502	A	09-12-1997	DE 4408547 A	12-10-1995
			AT 166738 T	15-06-1998
			WO 9525321 A	21-09-1995
			DE 59502343 D	02-07-1998
			EP 0750774 A	02-01-1997
			FI 963627 A	13-09-1996
			NO 963843 A	16-09-1996
EP 0767446	A	09-04-1997	JP 3134735 B	13-02-2001
			JP 9102055 A	15-04-1997
			US 5771008 A	23-06-1998
			CN 1158545 A	03-09-1997
			KR 197387 B	15-06-1999
			SG 65621 A	22-06-1999
			TW 425798 B	11-03-2001
JP 2000057483	A	25-02-2000	NONE	
JP 07254099	3 A		NONE	
EP 0903916	A	24-03-1999	NONE	

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)